DRI760

DDR3 1066 MHz Registered ECC 1.35V 240-pin DIMMs

Products in Family

DRI760/16GB (2 x 8GB 2Rx8 DIMMs)
DRI760/32GB (2 x 16GB 2Rx4 DIMMs)
DRI760/64GB (2 x 32GB 4Rx4 DIMMs)

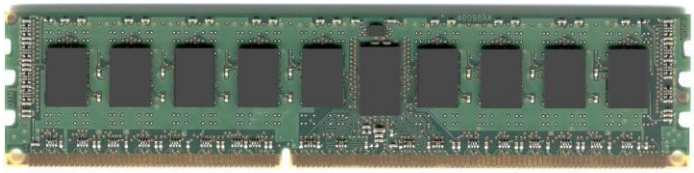

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181” x 5.25”) Data Transfer Rate: 8.53 Gigabytes/sec Operating Voltage: 1.35V(1.28V~1.45V) Fully RoHS Compliant Thermal Sensor	Each DRI760 upgrade consists of two DDR3 1066 MHz Registered ECC DIMMs. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	IBM Product	Product Description
DRI760/16GB	EM4B	16GB (2 x 8 GB RDIMMs) DDR3 1066MHz
DRI760/32GB	EM4C	(32 GB (2 x 16 GB RDIMMs) DDR3 1066 MHz
DRI760/64GB	EM4D	64 GB (2 x 32 GB RDIMMs) DDR3 1066 MHz

Front view

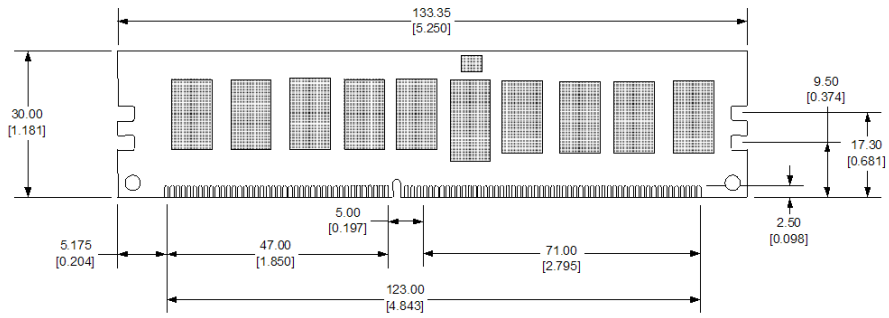

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

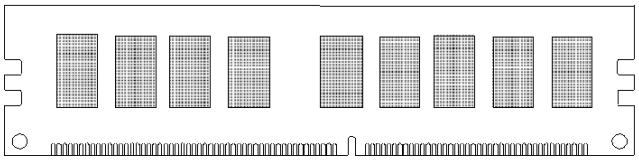

Side view



Copyright © 2013 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.